

Liner data sheet : 410216




Description : Metalized FFG liner with integral 2" DN50 High Pressure valve and 1" Elpo spout
Capacity : 1.000—1.100 Liter

Film technical properties

- Inner ply: 55 µm VLDPE
- Middle ply: 55 µm VLDPE
- Outer ply: 110 µm PET-MET

Temperature range: +5 — +80 °C
Oxygen transmission: < 1 cc / m² / day
Colour: Metalized

Liner shape & fitments

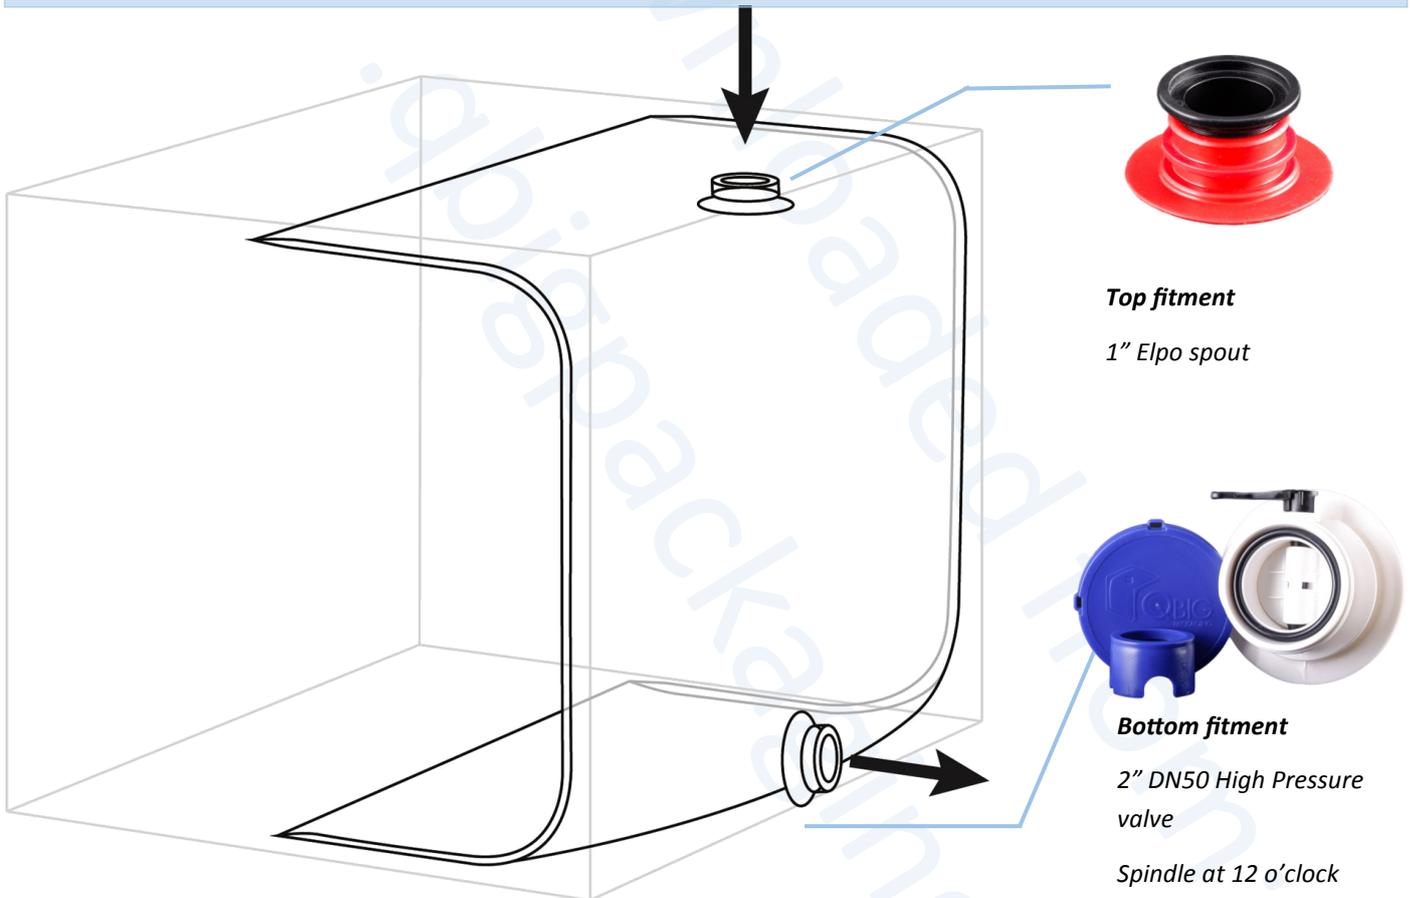

Top fitment
 1" Elpo spout

Bottom fitment
 2" DN50 High Pressure valve
 Spindle at 12 o'clock

Dimensions & Packaging

Liner dimensions	Weight per liner : 2,3 kg	Issued : 01-10-2014
Size : 220 x 210 cm (LxW)	Pieces per box : 5	Revised : 01-10-2014
Top fitment : 53 cm from seal	Boxes per pallet : 30	By : RvdB
Bottom fitment : 60 cm from seal	Pieces per pallet : 150	© Qbig Packaging B.V.
	Box DIM : 60 x 40 x 30 cm	Merwedeweg 6 3621 LR Breukelen
	Pallet DIM : 120 x 100 x 195 cm	Tel. +31 (0)346 251831
		info@qbigpackaging.com

* The information listed above is supplied in good faith and does not comprise a specification or warranty of any kind, either expressed or implied, including those of merchantability and fitness for purpose. Customers should determine the suitability of these materials for their specific use based upon their own internal criteria. Tests on individual samples may vary from those shown.