

# Liner data sheet : 410246




**Description** : Metalized T-liner with integral 2" DN50 High Pressure valve and 1" Elpo spout  
**Capacity** : 1.000—1.100 Liter

## Film technical properties

- Inner ply: 55 µm VLDPE
- Middle ply: 55 µm VLDPE
- Outer ply: 110 µm PET-MET

**Temperature range:** +5 — +80 °C  
**Oxygen transmission:** < 1 cc / m<sup>2</sup> / day  
**Colour:** Metalized

## Liner shape & fitments

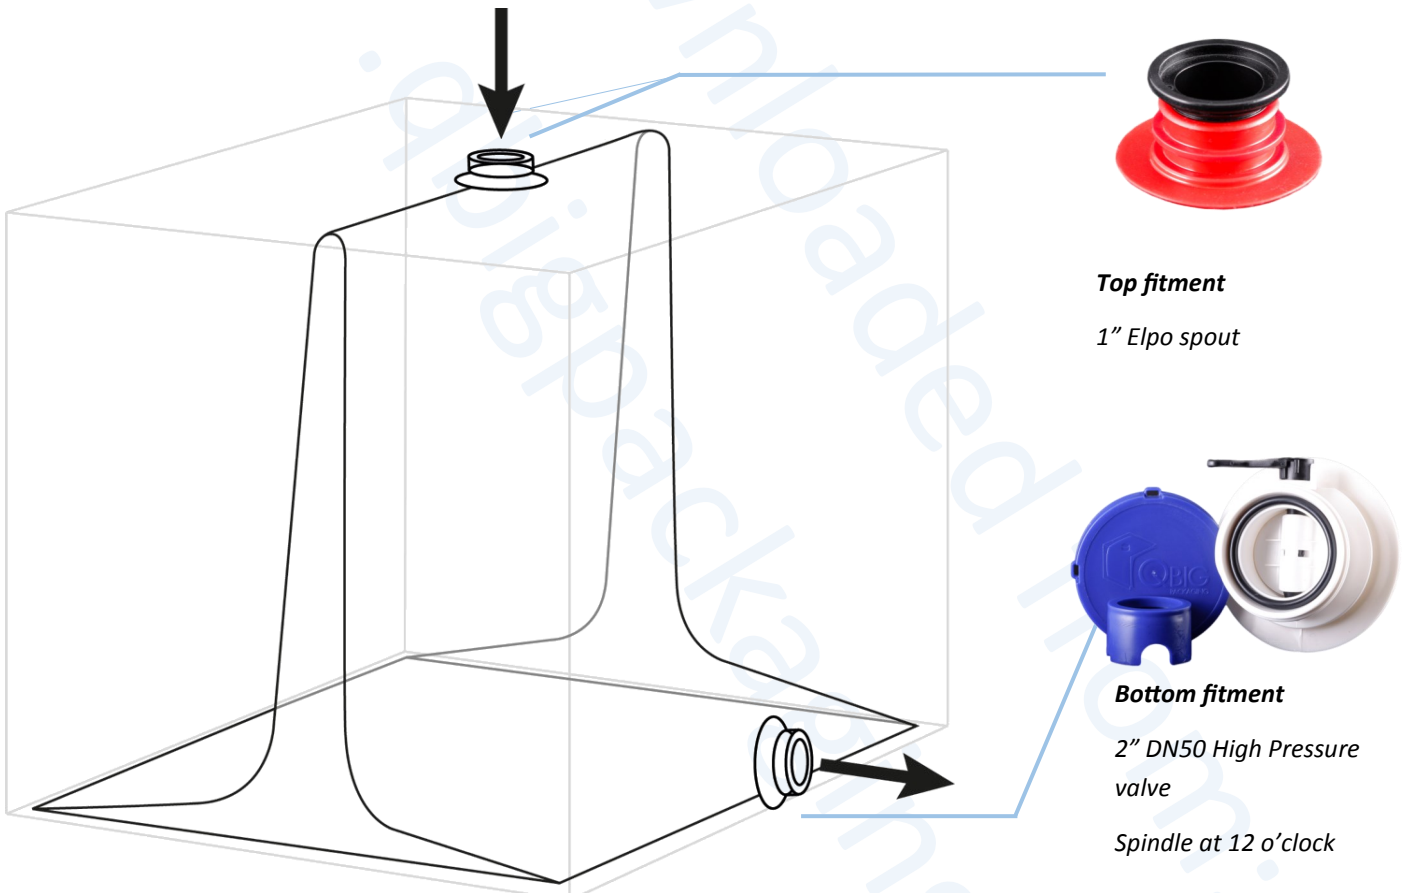

**Top fitment**  
 1" Elpo spout

**Bottom fitment**  
 2" DN50 High Pressure valve  
 Spindle at 12 o'clock

## Dimensions & Packaging

<b>Liner dimensions</b>	<b>Weight per liner</b> : 2,3 kg	<b>Issued</b> : 01-10-2014
<b>Size</b> : 220 x 210 cm (LxW)	<b>Pieces per box</b> : 5	<b>Revised</b> : 01-10-2014
<b>Top fitment</b> : Close to seal	<b>Boxes per pallet</b> : 30	<b>By</b> : RvdB
<b>Bottom fitment</b> : 60 cm from seal	<b>Pieces per pallet</b> : 150	<b>© Qbig Packaging B.V.</b>
	<b>Box DIM</b> : 60 x 40 x 30 cm	<b>Merwedeweg 6 3621 LR Breukelen</b>
	<b>Pallet DIM</b> : 120 x 100 x 195 cm	<b>Tel. +31 (0)346 251831</b>
		<b>info@qbigpackaging.com</b>

\* The information listed above is supplied in good faith and does not comprise a specification or warranty of any kind, either expressed or implied, including those of merchantability and fitness for purpose. Customers should determine the suitability of these materials for their specific use based upon their own internal criteria. Tests on individual samples may vary from those shown.