


Liner : 1.000 litre Top Fill  
Container : 285 BD  
Version : 1001.V2



The liner, fixation clip, TE and key.

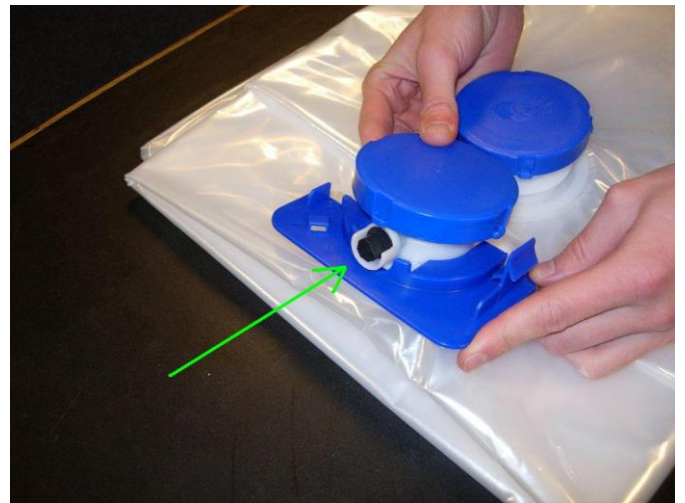

Place the first half of the fixation clip over the top of the valve, note the black piston.



Place the second half of the clip and click the two parts together.



Apply an option Temper Evident between the clip and the cap.



Fold down the panel opposite to the bottom outlet.



Unfold the liner totally with the valve on the lower side and pointed to the bottom outlet.



Fold/crumble the liner into a spout like shape.



IMPORTANT, note the small channel at the bottom of the outlet. This is essential.



IMPORTANT, first place the underside of the clip in the channel, (outside view).



IMPORTANT, first place the underside of the clip in the channel, (inside view).



Press the top end of the clip firmly until all. edges of the clip are against the container.



Place the top end of the liner over the edge, the bottom of the liner should be totally flat.



Pull up the rear panel gently and snap it into position.



After the rear panel is in place, the bottom of the liner should still lay flat in the container.



After the rear panel is in place, the bottom of the liner should still lay flat in the container.



Place the filling bridge and pull the liner upwards and place it over the rod.



Attach the filling cap to the filling bridge, now the liner is ready for use.



After the liner has been filled, an optional Temper Evident can be applied on the cap.

For more information feel free to contact our sales department: +31 346 251 831