

Liner data sheet : 410166



Description: T-liner with integral 2" S60 valve and 3" BSP cap


Film technical properties

- Inner ply: 55 µm VLDPE
- Middel ply: 55 µm VLDPE
- Outer ply: 55 µm VLDPE

Temperature range: +5 — +80 °C

Oxygen transmission: N.a.

Liner shape & fitments

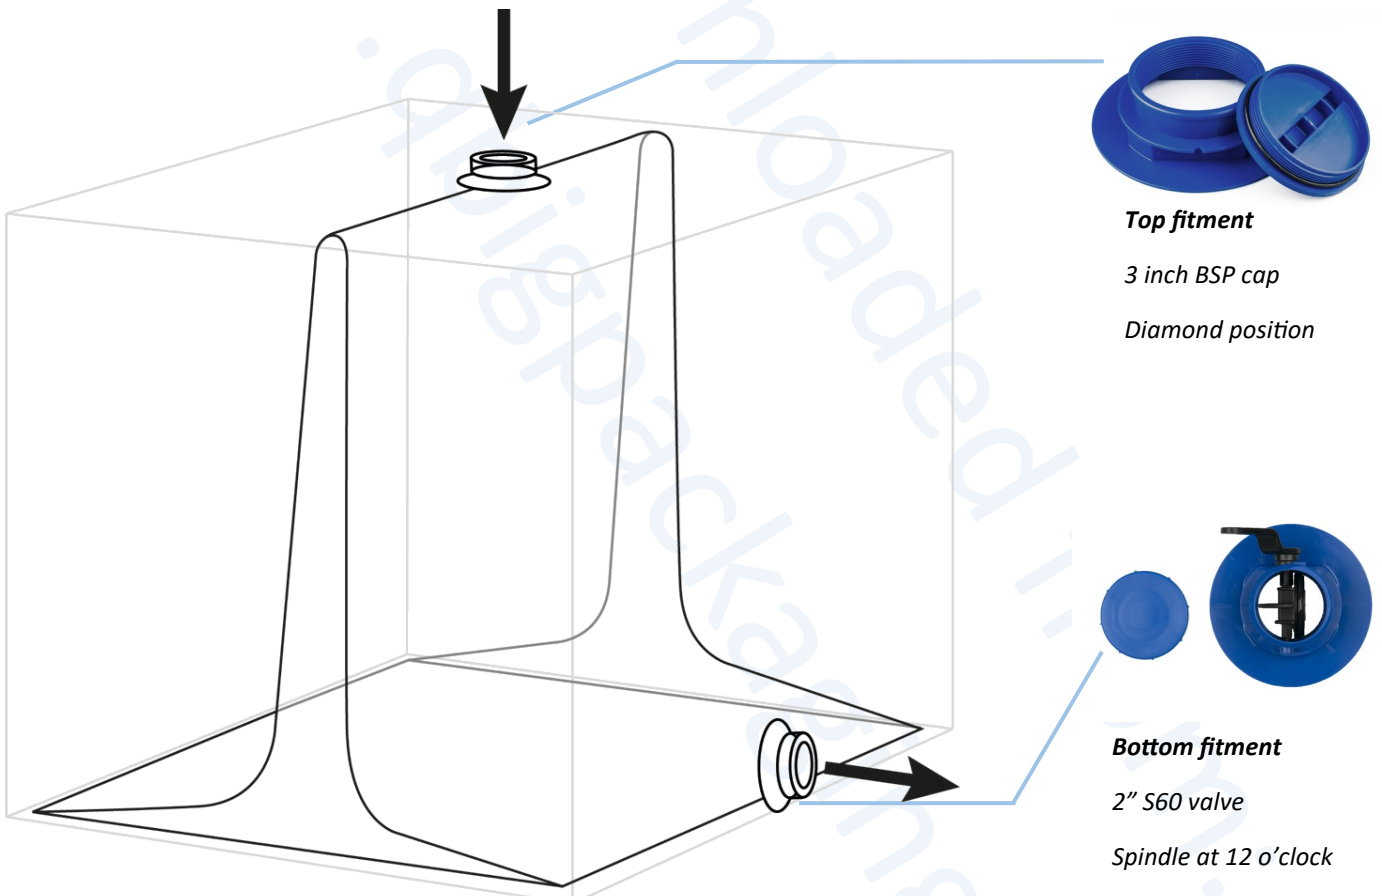

Top fitment

3 inch BSP cap

Diamond position

Bottom fitment

2" S60 valve

Spindle at 12 o'clock

Dimensions & Packaging

Liner dimensions	Weight per liner : 1,7 kg	Issued : 01-10-2014
Size : 220 x 210 cm (LxW)	Pieces per box : 5	Revised : 07-03-2018
Top fitment : Close to seal	Boxes per pallet : 30	By : RvdB
Bottom fitment : 60 cm from seal	Pieces per pallet : 150	
	Box DIM : 60 x 40 x 30 cm	© Qbig Packaging B.V.
	Pallet DIM : 120 x 100 x 195 cm	Straatweg 26 3604 BB Maarssen
		Tel. +31 (0)346 251831
		info@qbigpackaging.com

* The information listed above is supplied in good faith and does not comprise a specification or warranty of any kind, either expressed or implied, including those of merchantability and fitness for purpose. Customers should determine the suitability of these materials for their specific use based upon their own internal criteria. Tests on individual samples may vary from those shown.